



2 Kg Co2 FIRE EXTINGUISHER



- **CYLINDER**
Aluminum alloy AA6061, polished.
- **EXTINGUISHING AGENT**
Carbon Dioxide 99,99%
- **VALVE**
CPF M. 25x2, brass body, levers with black painting .
- **USE**
B fire rating (flammable liquids)
- **BRACKET**
Wall-mounted for valve, in standard equipment.

Note: image is for illustrative purpose only, the product purchased can has some differences

2Kg Co2 fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **EN 3-7**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



34



2 Kg Co2 FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	34 B
EXTINGUISHING AGENT	Co2 99,99%
TEMPERATURE RANGE	-30°C +60°C
NOMINAL CHARGE	2 Kg
FULL WEIGHT	~ 5,1 Kg
DIMENSIONS	Height 505 mm Diameter 117 mm
DISCHARGE TIME	6,5 sec.
VALVE TIGHTENING TORQUE	Minimum 95 Nm, Maximum 130 Nm
CYLINDER PRESSURE TEST	PT 212 bar
CYLINDER VOLUME	3 L.
SAFETY VALVE	Set 185 +15/-23 bar
CYLINDER MATERIAL	Aluminum alloy AA6061
EXTERNAL/INTERNAL TREATMENT	Polishing

PACKAGING

STANDARD : maximum 80 pieces for pallet
(80 pieces for box, max 1 box for pallet)
Pallet dimensions 100x120x70(h) cm

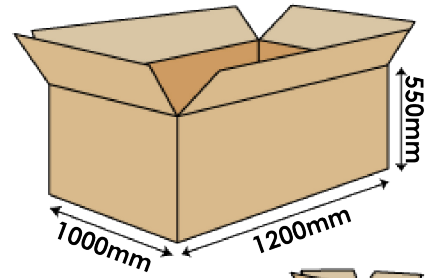


Note: the packaging quantities and measurements are indicative and can be subject at changes

SINGLE PACKAGING
ON REQUEST

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

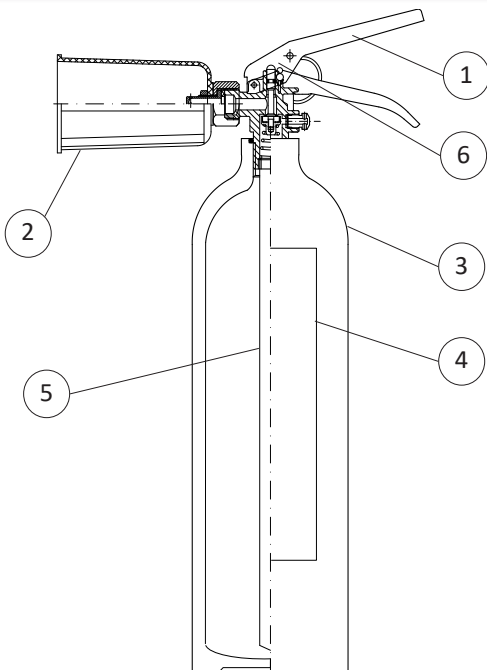

SPARE PARTS

NUMBER	DESCRIPTION	
1	Valve M. 25x2	
2	Horn	
3	Cylinder	
4	Label	
5	Aluminum dip tube	
6	Safety pin	
	Safety valve	
	Safety pin seal	