



5 Kg CO₂ FIRE EXTINGUISHER



- **CYLINDER**
Aluminum alloy AA6061, epoxypolyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
Carbon Dioxide 99,99%
- **VALVE**
Anti-magnetic type M. 25x2, stainless steel levers.
- **USE**
B fire rating (flammable liquids)

NOTE:
Fire extinguisher manufactured with low magnetic conductivity parts.

© REPRODUCTION IS PROHIBITED


Note: image is for illustrative purpose only, the product purchased can has some differences

5 Kg CO₂ fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7 (D.M. 7.1.2005)**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



89


5 Kg CO₂ FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	89 B
EXTINGUISHING AGENT	Carbon Dioxide 99,99%
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	5 Kg
FULL WEIGHT	~ 12,3 Kg
DIMENSIONS	Height(base-valve) 670 mm Diameter 152 mm
DISCHARGE TIME	12,5 sec.
VALVE TIGHTENING TORQUE	Minimum 95 Nm, Maximum 130 Nm
CYLINDER PRESSURE TEST	PT 212 bar
CYLINDER VOLUME	7,5 L.
SAFETY VALVE	Set at 185 +/- 15 bar
CYLINDER MATERIAL	Aluminum alloy AA6061
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour


PACKAGING

STANDARD : maximum 48 pieces for pallet
(48 pieces for box, max 1 box for pallet)
Pallet dimensions 100x120x100(h) cm

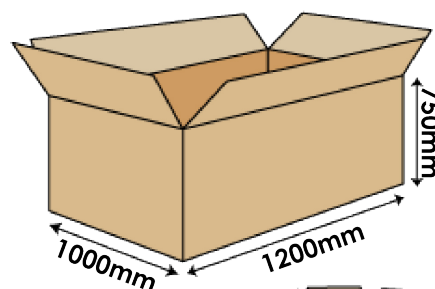


Note: the packaging quantities and measurements are indicative and can be subject at changes

SINGLE PACKAGING
ON REQUEST



MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

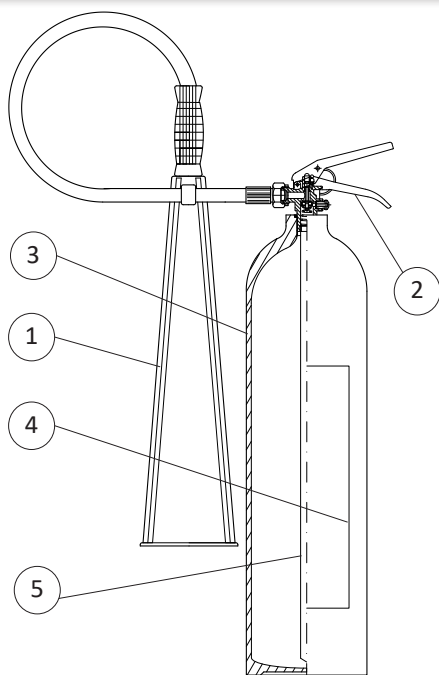

SPARE PARTS

NUMBER	DESCRIPTION	
1	Hose SAE 100 R1 T ½" with horn, Europe model	
2	Valve M. 25x2	
3	Cylinder	
4	Label	
5	Aluminum dip tube	
	Safety pin seal	