



6 Kg Powder FIRE EXTINGUISHER



CLIP DETAIL



- **CYLINDER**
Alloy steel, 3 pieces drawing, with clip, epoxy polyester powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
ABC Powder - MAP 20 %.
- **PROPELLANT**
Fire extinguisher pressurized at moment of use with gr. 150 CO₂ cartridge.
- **VALVE**
M. 74x2, lightweight aluminum alloy, activation with percussion method.
- **USE**
A B C fire rating (solid materials, flammable liquids, flammable gas).
- **BRACKET**
Wall-mounted bracket for cylinder with clip, red painting, in standard equipment.


Note: image is for illustrative purpose only, the product purchased can has some differences

6 Kg powder fire extinguisher, pressurized at moment of use, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7 (D.M. 7.1.2005)**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment **PED 2014/68/EU**.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



FIRE RATING :



34



233




6 Kg Powder FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	34 A 233 B C
EXTINGUISHING AGENT	EPW 18462 ABC powder - MAP 20 %
PROPELLANT	Internal cartridge with gr. 150 CO ₂
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	6 Kg
FULL WEIGHT	~ 10,5 Kg
DIMENSIONS	Height 515(valve) / 530(hose) mm Diameter(cylinder) 152 mm
DISCHARGE TIME	15,5 sec.
VALVE TIGHTENING TORQUE	Minimum 40 Nm, Maximum 60 Nm
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	6,7 L.
SAFETY VALVE	Set 24 +/- 2 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour

PACKAGING


STANDARD : maximum 60 pieces on pallet 100x120 cm in single packaging

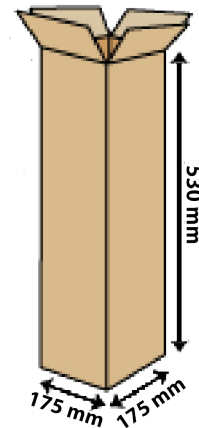

Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

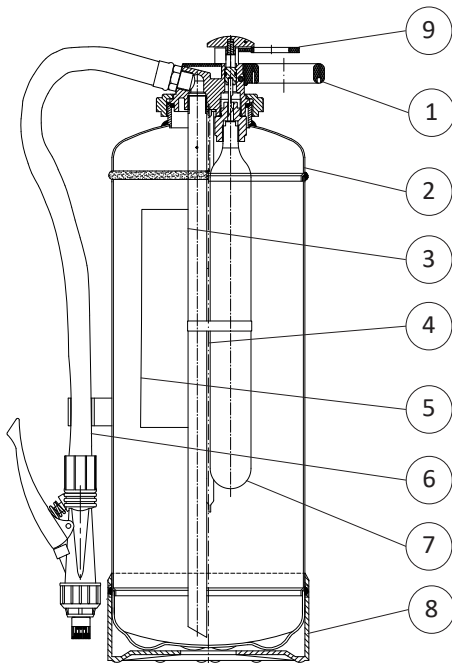

SPARE PARTS

NUMBER	DESCRIPTION	
1	Valve M. 74x2	
2	Cylinder	
3	PVC dip tube	
4	Pressurization dip tube	
5	Label	
6	Hose	
7	gr. 150 CO ₂ cartridge	
8	PELD base	
9	Safety pin	
	Safety pin seal	